


A-A'	FAÇADE BASE	H-H'	INSIDE CORNER (OPEN JOINT)
B-B'	PARAPET CAP	I-I'	OUTSIDE CORNER (OPEN JOINT)
C-C'	HORIZONTAL JOINT	J-J'	DOOR HEAD
D-D'	VERTICAL JOINT	K-K'	DOOR JAMB
E-E'	WINDOW SILL	L-L'	VENTILATION DROPPED CEILING
F-F'	WINDOW JAMB	M-M'	SIDE VENTILATION DROPPED CEILING
G-G'	WINDOW HEAD		

The updated version of this present installation detail can be found on the PARKLEX PRODEMA web. Panel sizes and maximum distances in technical catalogue.


PA	RKLEX PRODEMA
	www.parklexprodema.com

	PRODUCT	SYSTEM	DRAWN BY	DATE
A	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-G.P.	GENERAL PERSPECTIVE	Maialen Irastorza	1 / 18

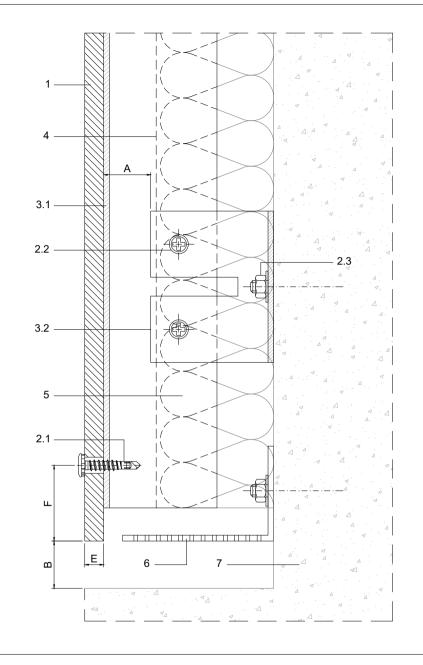


1	NATURCLAD	
2	Screw	s
	2.1	Panel fastener metal
	2.2	Channel fastener - by others
	2.3	Wall fixing screw - by others
3	Profile	s
	3.1	Aluminium L profile (40x60)
	3.2	Wall bracket
	3.3	Aluminium T profile
	3.4	Jamb profile - by others
	3.5	Sill profile - by others
	3.6	Coronation profile - by others
4	Water	resistant barrier - by others
5	Therm	al insulation - by others
6	Vent.	screen - by others
7	Prima	ry structure - by others

A Required min. all chamber 2 20mm		Required min. air chamber 2 20mm
B Circulation of air ≥ 20mm		Circulation of air ≥ 20mm
	D	Expansion joint 6-10mm
E Panel thickness ≥ 8mm		Panel thickness ≥ 8mm
		Distance from the screws to the panel edges 20-40mm




ŀ

	PRODUCT	SYSTEM	DRAWN BY	DATE
A	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-A	DETAIL A-A' // FAÇADE BASE	Maialen Irastorza	2 / 18

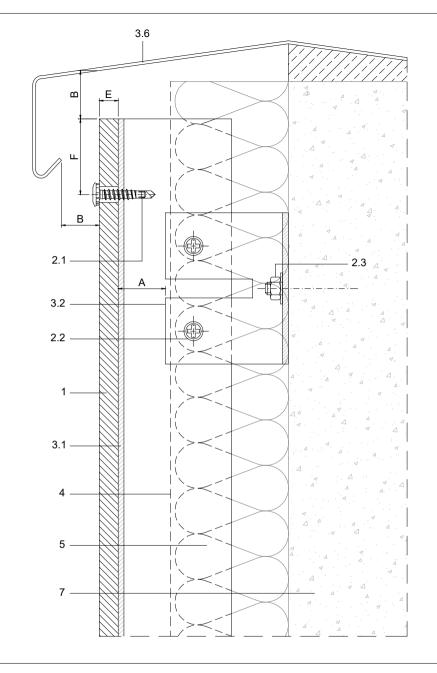


NATURCLAD	
Screw	s
2.1	Panel fastener metal
2.2	Channel fastener - by others
2.3	Wall fixing screw - by others
Profile	s
3.1	Aluminium L profile (40x60)
3.2	Wall bracket
3.3	Aluminium T profile
3.4	Jamb profile - by others
3.5	Sill profile - by others
3.6	Coronation profile - by others
Water	resistant barrier - by others
Therm	al insulation - by others
Vent.	screen - by others
Prima	ry structure - by others
	2.1 2.2 2.3 Profile 3.1 3.2 3.3 3.4 3.5 3.6 Water Therm

A Required min. air chamber ≥ 20mm		Required min. air chamber ≥ 20mm
B Circulation of air ≥ 20mm		Circulation of air ≥ 20mm
	D	Expansion joint 6-10mm
E Panel thickness ≥ 8mm		Panel thickness ≥ 8mm
		Distance from the screws to the panel edges 20-40mm




RODEMA dema.com

01/2022
PAGE
storza 3 / 18

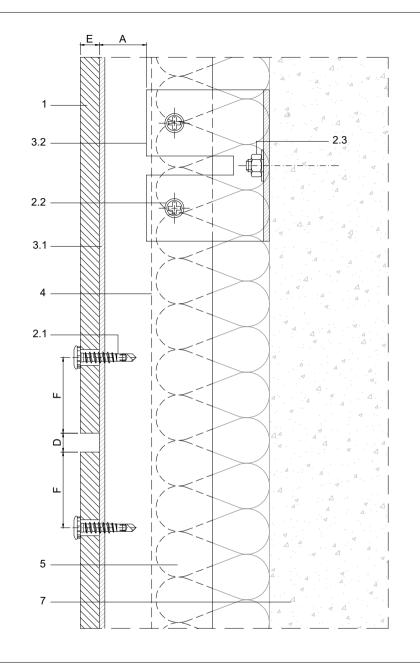


1	NATURCLAD	
2	Screw	8
_	2.1	Panel fastener metal
	2.2	
		Wall fixing screw - by others
3	Profile	o ,
	3.1	Aluminium L profile (40x60)
	3.2	Wall bracket
	3.3	Aluminium T profile
	3.4	Jamb profile - by others
	3.5	Sill profile - by others
	3.6	Coronation profile - by others
4	Water	resistant barrier - by others
5	Therm	al insulation - by others
6	Vent.	screen - by others
7	Prima	ry structure - by others

Α	Required min. air chamber ≥ 20mm
В	Circulation of air ≥ 20mm
D	Expansion joint 6-10mm
Е	Panel thickness ≥ 8mm
	Distance from the screws to the panel edges 20-40mm




PARKLEX PRODEMA
www.parklexprodema.com

PROD	DUCT	SYSTEM	DRAWN BY	DATE
A	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
PLAN	N#	TITLE	APPROVED BY	PAGE
	NC2-01-C	DETAIL C-C' // HORIZONTAL JOINT	Maialen Irastorza	4 / 18

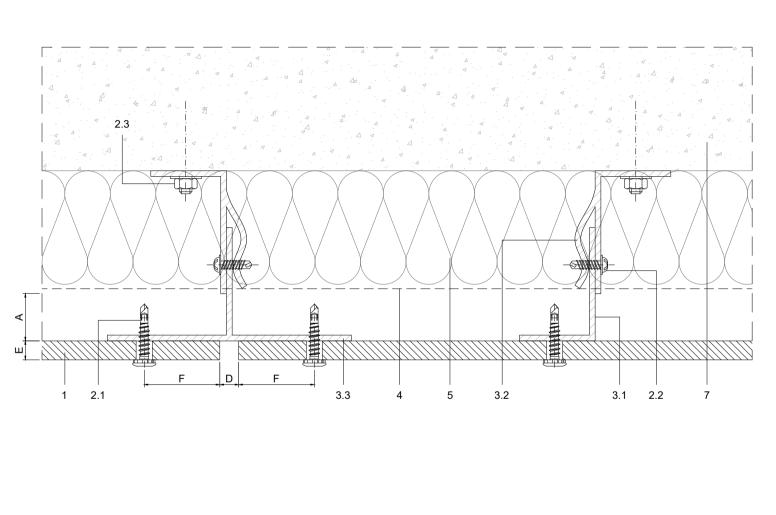


1	NATURCLAD		
2	Screws		
	2.1	Panel fastener metal	
	2.2	Channel fastener - by others	
	2.3	Wall fixing screw - by others	
3	Profile	S	
	3.1	Aluminium L profile (40x60)	
	3.2	Wall bracket	
	3.3	Aluminium T profile	
	3.4	Jamb profile - by others	
	3.5	Sill profile - by others	
	3.6	Coronation profile - by others	
4	Water	resistant barrier - by others	
5	Therm	hermal insulation - by others	
6	Vent.	Vent. screen - by others	
7	Primary structure - by others		
	•		

Α	Required min. air chamber ≥ 20mm
В	Circulation of air ≥ 20mm
D	Expansion joint 6-10mm
Е	Panel thickness ≥ 8mm
	Distance from the screws to the panel edges 20-40mm




|--|

	PRODUCT	SYSTEM	DRAWN BY	DATE
IA	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-D	DETAIL D-D' // VERTICAL JOINT	Maialen Irastorza	5 / 18

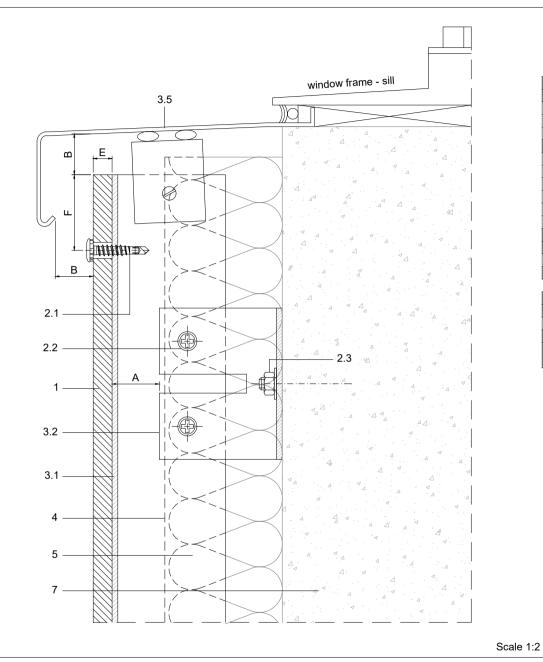


1	NATURCLAD		
2	Screws		
	2.1	Panel fastener metal	
	2.2	Channel fastener - by others	
	2.3	Wall fixing screw - by others	
3	Profile	s	
	3.1	Aluminium L profile (40x60)	
	3.2	Wall bracket	
	3.3	Aluminium T profile	
	3.4	Jamb profile - by others	
	3.5	Sill profile - by others	
	3.6	Coronation profile - by others	
4	Water	Water resistant barrier - by others	
5	Therm	mal insulation - by others	
6	Vent.	ent. screen - by others	
7	Primary structure - by others		

Α	Required min. air chamber ≥ 20mm
В	Circulation of air ≥ 20mm
D	Expansion joint 6-10mm
Е	Panel thickness ≥ 8mm
	Distance from the screws to the panel edges 20-40mm




	PRODUCT	SYSTEM	DRAWN BY	DATE
AA.	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-E	DETAIL E-E' // WINDOW SILL	Maialen Irastorza	6/18
				l .

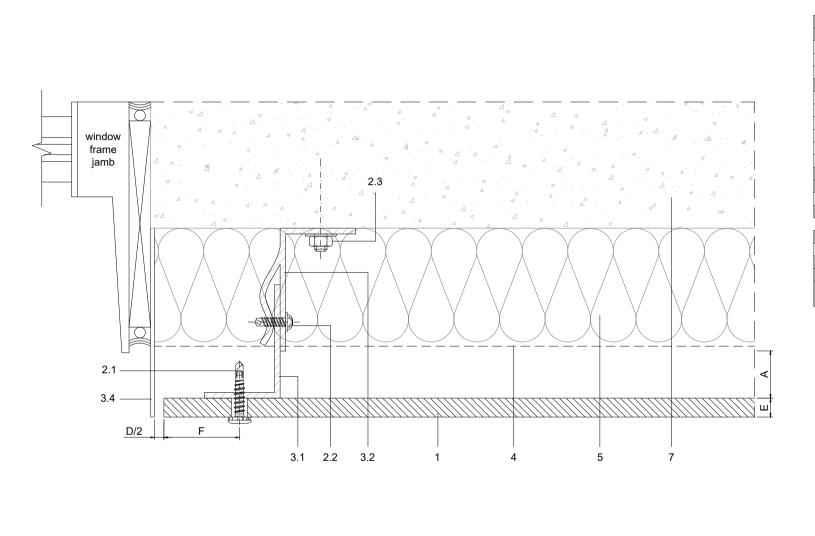


1	NATURCLAD		
2	Screw	s	
	2.1	Panel fastener metal	
	2.2	Channel fastener - by others	
	2.3	Wall fixing screw - by others	
3	Profile	s	
	3.1	Aluminium L profile (40x60)	
	3.2	Wall bracket	
	3.3	Aluminium T profile	
	3.4	Jamb profile - by others	
	3.5	Sill profile - by others	
	3.6	Coronation profile - by others	
4	Water resistant barrier - by others		
5	Thermal insulation - by others		
6	Vent. screen - by others		
7	Primary structure - by others		


Α	Required min. air chamber ≥ 20mm
В	Circulation of air ≥ 20mm
D	Expansion joint 6-10mm
Е	Panel thickness ≥ 8mm
	Distance from the screws to the panel edges 20-40mm



	PRODUCT	SYSTEM	DRAWN BY	DATE
MA	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-F	DETAIL F-F' // WINDOW JAMB	Maialen Irastorza	7 / 18

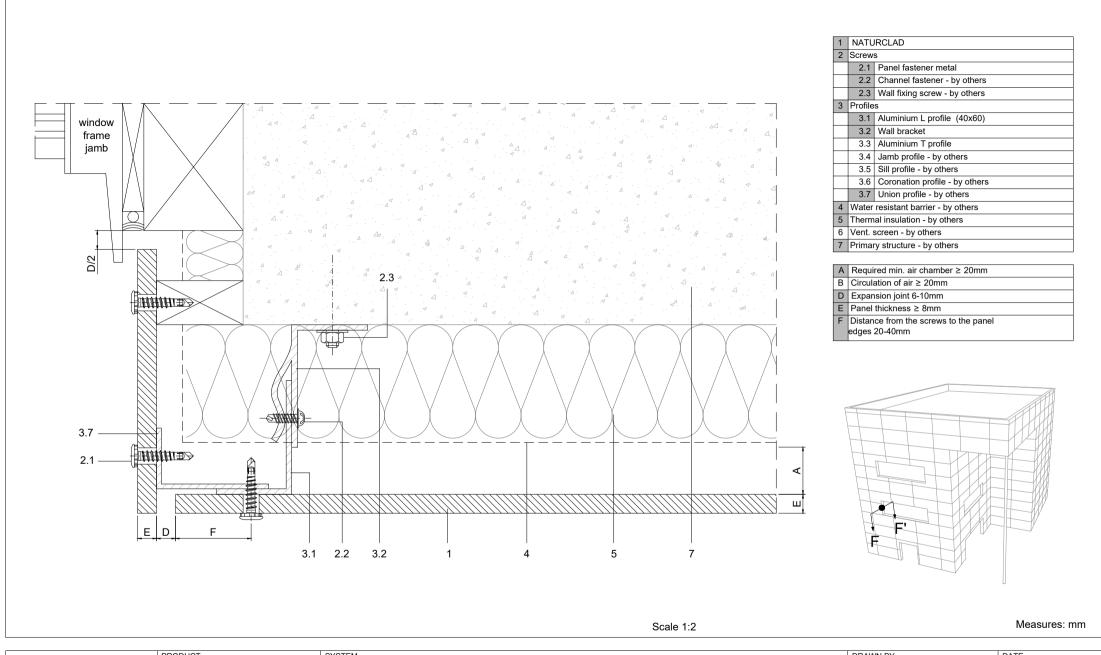


PARKLEX PRODEMA	PRODUCT NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
www.parklexprodema.com	PLAN# NC2-01-F2	DETAIL F-F' // WINDOW JAMB 2	APPROVED BY Maialen Irastorza	PAGE 8 / 18

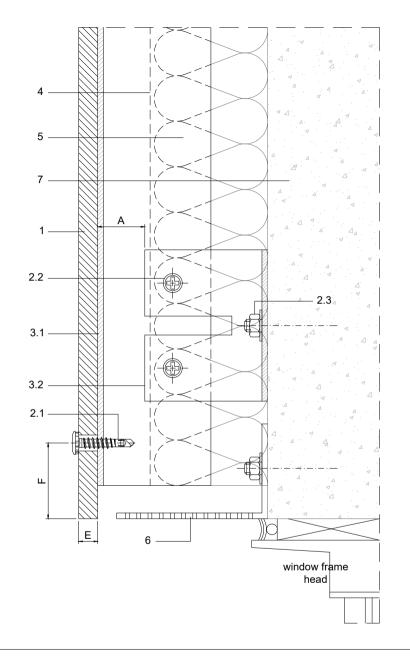


1	NATURCLAD		
2	Screw	S	
	2.1	Panel fastener metal	
	2.2	Channel fastener - by others	
	2.3	Wall fixing screw - by others	
3	Profile	s	
	3.1	Aluminium L profile (40x60)	
3.2 Wall bracket			
3.3 Aluminium T profile		Aluminium T profile	
3.4 Jamb profile - by others			
3.5 Sill profile - by others			
	3.6	Coronation profile - by others	
4	Water	resistant barrier - by others	
5	Therm	al insulation - by others	
6	Vent. s	screen - by others	
7	Primary structure - by others		

Α	Required min. air chamber ≥ 20mm
В	Circulation of air ≥ 20mm
D	Expansion joint 6-10mm
Е	Panel thickness ≥ 8mm
	Distance from the screws to the panel edges 20-40mm




	PRODUCT	SYSTEM	DRAWN BY	DATE
A	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-G	DETAIL G-G' // WINDOW HEAD	Maialen Irastorza	9 / 18

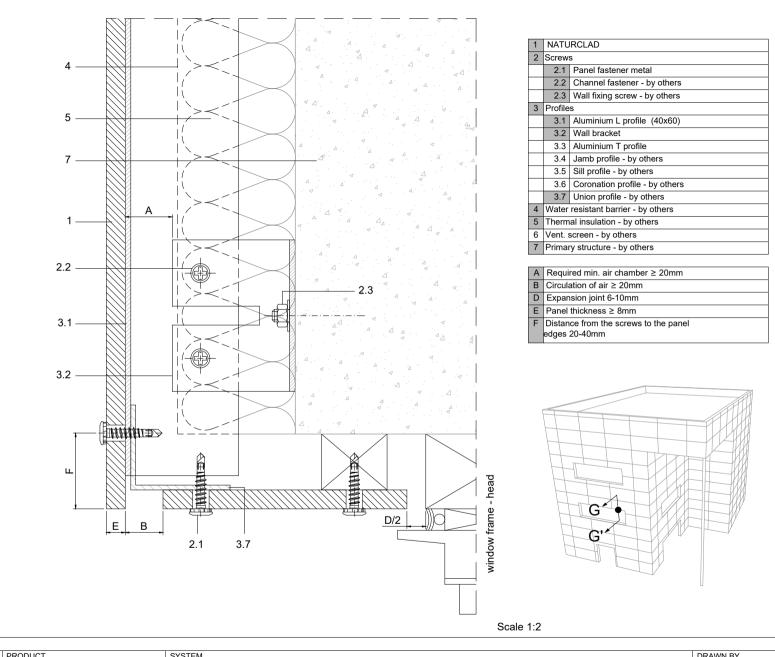

PARKLEX PRODEMA	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
www.parklexprodema.com	PLAN# NC2-01-G2	TITLE DETAIL G-G' // WINDOW HEAD 2	APPROVED BY Maialen Irastorza	PAGE 10 / 18

Measures: mm

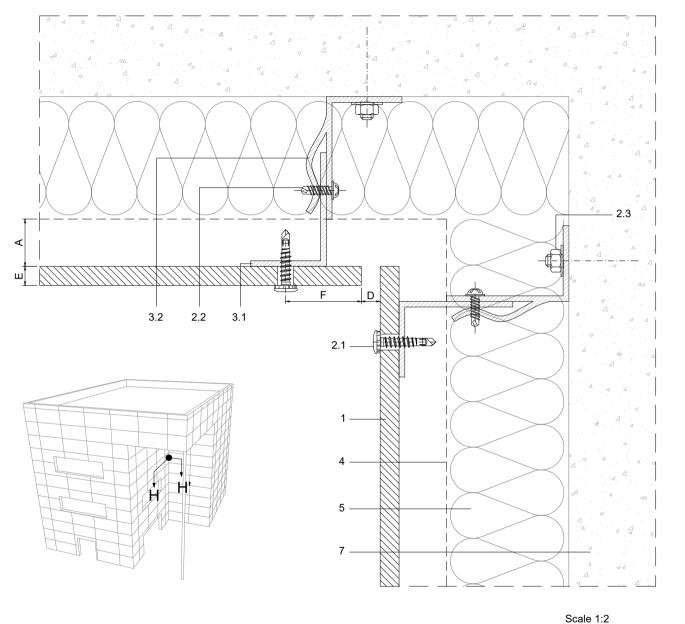

1	NATU	NATURCLAD		
2	Screw	Screws		
	2.1	Panel fastener metal		
	2.2	Channel fastener - by others		
	2.3	Wall fixing screw - by others		
3	Profile	s		
	3.1	Aluminium L profile (40x60)		
	3.2	Wall bracket		
	3.3	Aluminium T profile		
	3.4	Jamb profile - by others		
	3.5	Sill profile - by others		
	3.6	Coronation profile - by others		
4	Water	resistant barrier - by others		
5	Therm	al insulation - by others		
6	Vent.	screen - by others		
7	Prima	ry structure - by others		


- A Required min. air chamber ≥ 20mm B Circulation of air ≥ 20mm D Expansion joint 6-10mm
- E Panel thickness ≥ 8mm
- F Distance from the screws to the panel edges 20-40mm

Scale 1:2

Measures: mm


PARKLEX PRODEMA www.parklexprodema.com

	PRODUCT	SYSTEM	DRAWN BY	DATE
A	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-H	DETAIL H-H' // INSIDE CORNER	Maialen Irastorza	11 / 18

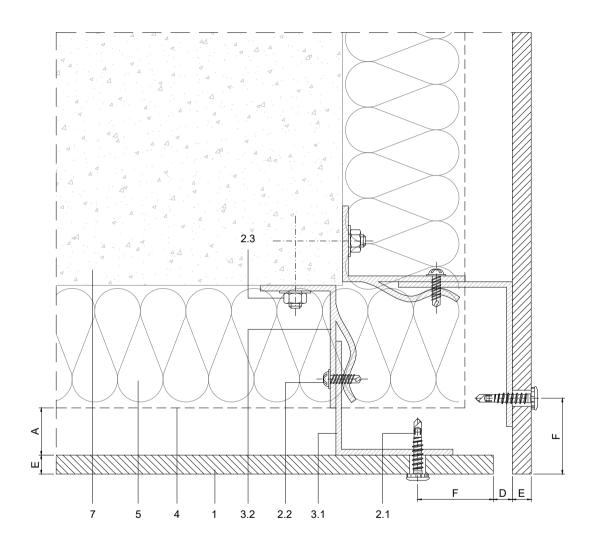


1	NATURCLAD			
2	Screw	s		
	2.1	Panel fastener metal		
	2.2	Channel fastener - by others		
	2.3	Wall fixing screw - by others		
3	Profile	s		
	3.1	Aluminium L profile (40x60)		
3.2 Wall bracket				
	3.3 Aluminium T profile			
	3.4 Jamb profile - by others			
	3.5 Sill profile - by others			
	3.6	Coronation profile - by others		
4	Water	resistant barrier - by others		
5	Therm	al insulation - by others		
6	Vent.	screen - by others		
7	Primary structure - by others			

Α	Required min. air chamber ≥ 20mm		
В	Circulation of air ≥ 20mm		
D	D Expansion joint 6-10mm		
Е	Panel thickness ≥ 8mm		
	Distance from the screws to the panel edges 20-40mm		




PARKLEX PRODEMA
www.parklexprodema.com

	PRODUCT	SYSTEM	DRAWN BY	DATE
A A	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-I	DETAIL I-I' // OUTSIDE CORNER	Maialen Irastorza	12 / 18

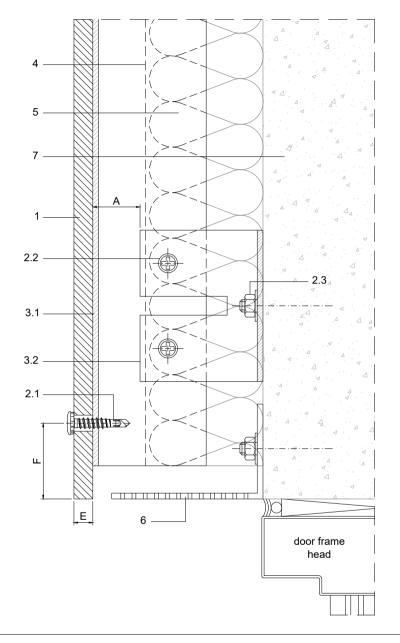


1	NATURCLAD			
2	Screws			
	2.1	Panel fastener metal		
	2.2	Channel fastener - by others		
	2.3	Wall fixing screw - by others		
3	Profile	s		
	3.1	Aluminium L profile (40x60)		
	3.2	Wall bracket		
	3.3	Aluminium T profile		
	3.4	Jamb profile - by others		
	3.5	Sill profile - by others		
	3.6	Coronation profile - by others		
4	Water	ater resistant barrier - by others		
5	Therm	nal insulation - by others		
6	Vent. s	nt. screen - by others		
7	Primary structure - by others			

Α	A Required min. air chamber ≥ 20mm	
B Circulation of air ≥ 20mm D Expansion joint 6-10mm		
		Е
	Distance from the screws to the panel	
	edges 20-40mm	

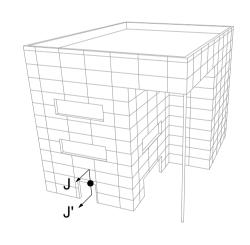


	PRODUCT	SYSTEM	DRAWN BY	DATE
IA	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-J	DETAIL J-J' // DOOR HEAD	Maialen Irastorza	13 / 18

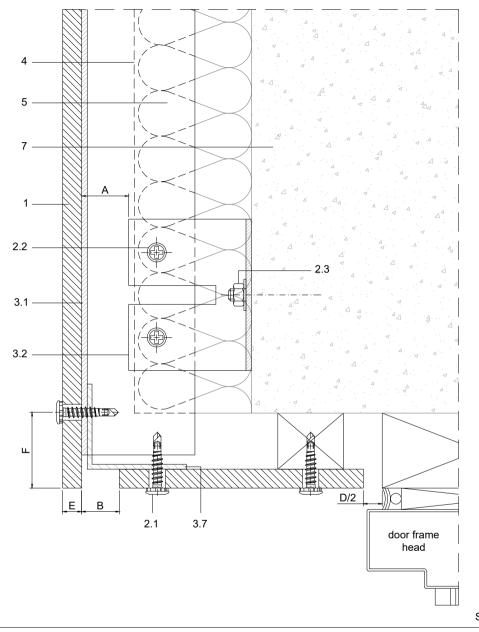


1	NATURCLAD				
2	Screws				
	2.1	Panel fastener metal			
	2.2	Channel fastener - by others			
	2.3	Wall fixing screw - by others			
3	Profile	s			
	3.1	3.1 Aluminium L profile (40x60)			
	3.2	3.2 Wall bracket			
	3.3	3.3 Aluminium T profile			
	3.4	3.4 Jamb profile - by others			
	3.5	3.5 Sill profile - by others			
	3.6	3.6 Coronation profile - by others			
	3.7	3.7 Union profile - by others			
4	Water	ater resistant barrier - by others			
5	Therm	Thermal insulation - by others			
6	Vent. s	Vent. screen - by others			
7	Primary structure - by others				

	A	Required min. air chamber ≥ 20mm
B Circulation of air ≥ 20mm D Expansion joint 6-10mm E Panel thickness ≥ 8mm F Distance from the screws to the panel edges 20-40mm		Circulation of air ≥ 20mm
		Expansion joint 6-10mm
		Panel thickness ≥ 8mm

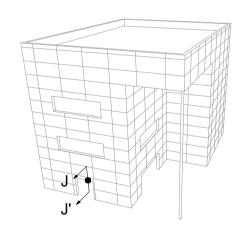


PARKLEX PRODEMA www.parklexprodema.com
--


	PRODUCT	SYSTEM	DRAWN BY	DATE
Δ	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-J2	DETAIL J-J? // DOOR HEAD 2	Maialen Irastorza	14 / 18

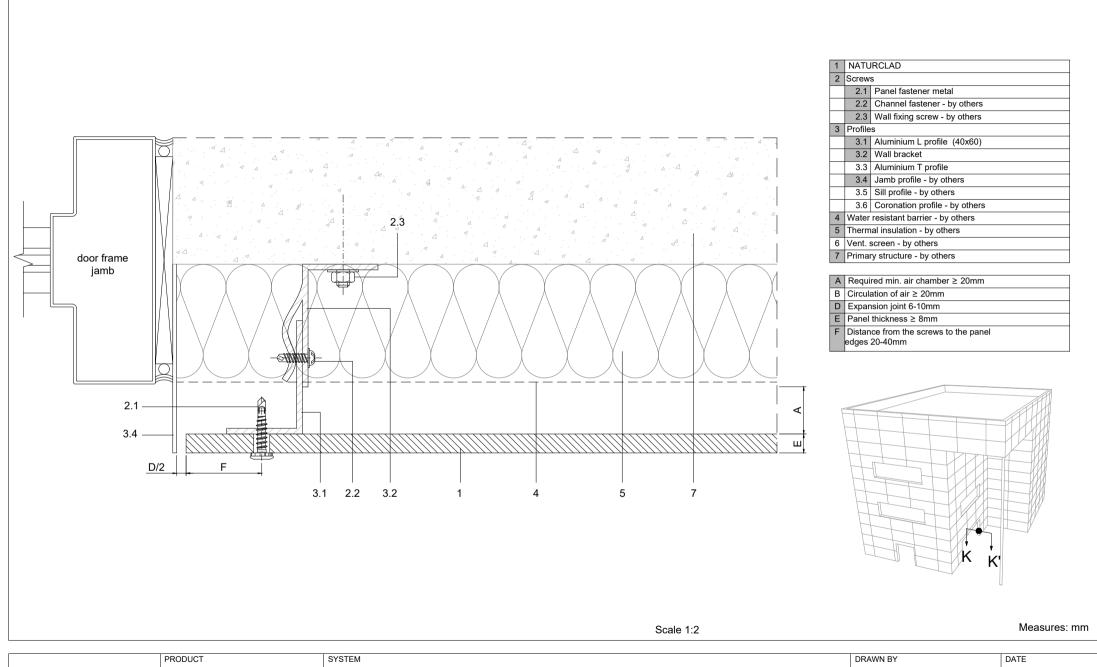

PARKLEX PRODEMA	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
www.parklexprodema.com	PLAN# NC2-01-K	DETAIL K-K' // DOOR JAMB	APPROVED BY Maialen Irastorza	PAGE 15 / 18

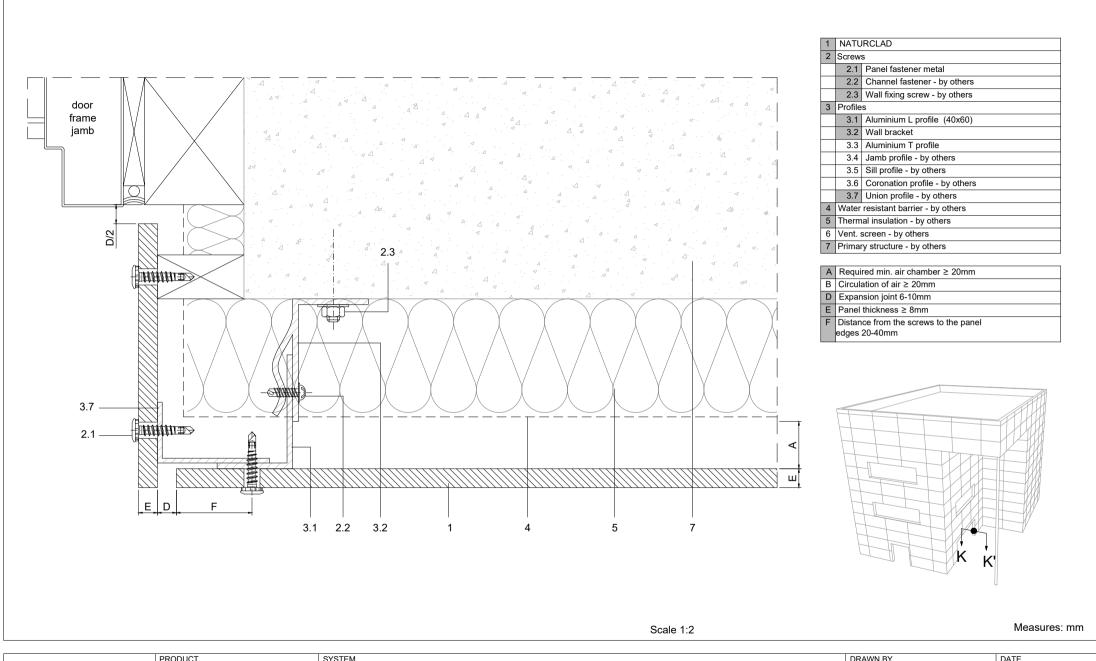


PARKLEX PRODEMA	NATURCLAD NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022	
www.parklexprodema.com	PLAN# NC2-01-K2	TITLE DETAIL K-K' // DOOR JAMB 2	APPROVED BY Maialen Irastorza	PAGE 16 / 18	

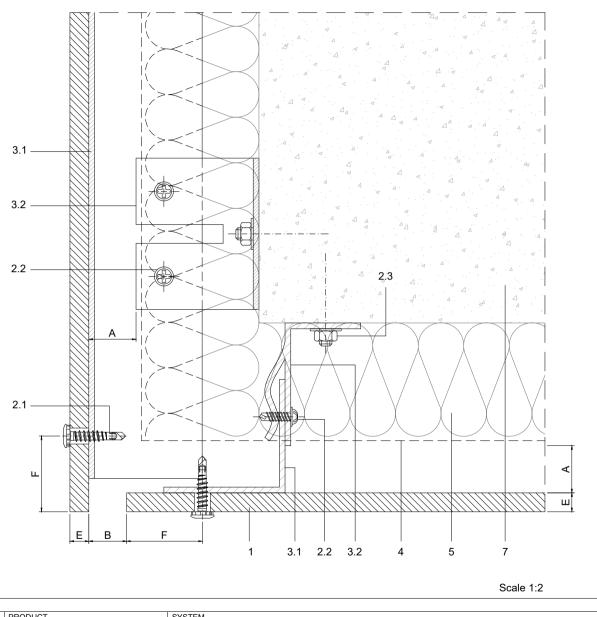


1	NATU	NATURCLAD		
2	Screw	s		
	2.1	Panel fastener metal		
	2.2	Channel fastener - by others		
	2.3	Wall fixing screw - by others		
3	Profile	s		
	3.1	Aluminium L profile (40x60)		
	3.2	Wall bracket		
	3.3	3 Aluminium T profile		
	3.4	Jamb profile - by others		
	3.5	Sill profile - by others		
	3.6	Coronation profile - by others		
4	Water	resistant barrier - by others		
5	Therm	mal insulation - by others		
6	Vent. s	t. screen - by others		
7	Primary structure - by others			

Α	Required min. air chamber ≥ 20mm
В	Circulation of air ≥ 20mm
D	Expansion joint 6-10mm
Е	Panel thickness ≥ 8mm
	Distance from the screws to the panel




	PRODUCT	SYSTEM	DRAWN BY	DATE
A	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-L	DETAIL L-L' // VENTILATION DROPPED CEILING	Maialen Irastorza	17 / 18

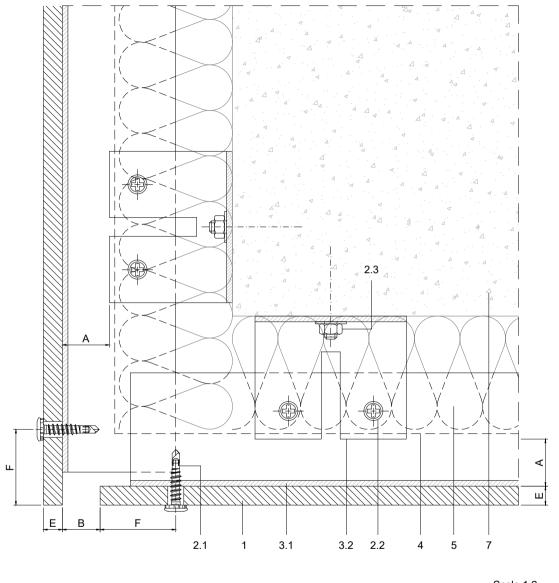

1	NATURCLAD			
2	Screws			
	2.1	Panel fastener metal		
	2.2	Channel fastener - by others		
	2.3	Wall fixing screw - by others		
3	Profiles			
	3.1	Aluminium L profile (40x60)		
	3.2	Wall bracket		
	3.3	Aluminium T profile		
	3.4	Jamb profile - by others		
	3.5	Sill profile - by others		
	3.6	Coronation profile - by others		
4	Water	ter resistant barrier - by others		
5	Therm	Thermal insulation - by others		
6	Vent. screen - by others			
7	Primary structure - by others			

Α	Required min. air chamber ≥ 20mm		
В	Circulation of air ≥ 20mm		
D	Expansion joint 6-10mm		
Ε	Panel thickness ≥ 8mm		
F	Distance from the screws to the panel edges 20-40mm		

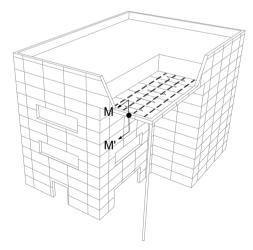

	PRODUCT	SYSTEM	DRAWN BY	DATE
A	NATURCLAD	EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS	Joseba Salbide	01/2022
[PLAN#	TITLE	APPROVED BY	PAGE
	NC2-01-M	DETAIL M-M' // SIDE VENTILATION DROPPED CEILING	Maialen Irastorza	18 / 18