

Measurements in inches are approximated. Real measurements in mm.

The updated version of this present installation detail can be found on the PARKLEX PRODEMA web. Panel sizes and maximum distances in technical catalogue.

	PRODUCT	SYSTEM	DRAWN BY	DATE
PARKLEX PRODEMA	NATURSOFFIT	CONCEALED FASTENING WITH HANGING HOOKS, ON SOFFITS	Joseba Salbide	01/2022
www.parklexprodema.com	PLAN#	TITLE	APPROVED BY	PAGE
	NSF1-02-A-G.P.	GENERAL PERSPECTIVE	Maialen Irastorza	1 / 7

F-F' SOFFIT-WALL EXTERIOR DETAIL (GRAIN DIRECTION)

1	NATU	NATURSOFFIT				
2	Screw	Screws				
	2.a	2.a Hanging hook fastener - panel back				
	2.b	Channel fastener - by others				
	2.c	Wall fixing screw - by others				
	2.d	Fixing screw - by others				
3	Profile	s				
	3.a	Aluminum J profile				
	3.b	Horizontal carrier rail				
	3.c	Hanging hook				
4	Water resistant barrier - by others					
А	Requi	red min. air chamber ≥ 3/4" (20mm)				
В	Circula	Circulation of air $\ge 3/4"$ (20mm)				
D	Expar	Expansion joint 1/4" - 5/16" (6-8mm)				
Е	Panel	Panel thickness ≥ 5/16" (8mm)				
F		ce from the screws to the panel 3/4" - 1 1/2" (20-40mm)				



Measurements in inches are approximated. Real measurements in mm.


Scale 1:2

	PRODUCT	SYSTEM	DRAWN BY	DATE
PARKLEX PRODEMA www.parklexprodema.com	NATURSOFFIT	CONCEALED FASTENING WITH HANGING HOOKS, ON SOFFITS	Joseba Salbide	01/2022
	PLAN#	TITLE	APPROVED BY	PAGE
	NSF1-02-A-A	DETAIL A-A' // JOINT DETAIL (PERP. TO GRAIN DIRECTION)	Maialen Irastorza	2 / 7

1	NATURSOFFIT				
2	Screw	s			
	2.a	Hanging hook fastener - panel back			
	2.b	Channel fastener - by others			
	2.c	Wall fixing screw - by others			
	2.d	Fixing screw - by others			
3	Profile	5			
	3.a	Aluminum J profile			
	3.b	Horizontal carrier rail			
	3.c	Hanging hook			
4	Water	Water resistant barrier - by others			

А	Required min. air chamber \geq 3/4" (20mm)			
В	Circulation of air \geq 3/4" (20mm)			
D	Expansion joint 1/4" - 5/16" (6-8mm)			
Е	Panel thickness ≥ 5/16" (8mm)			
F	Distance from the screws to the panel edges 3/4" - 1 1/2" (20-40mm)			




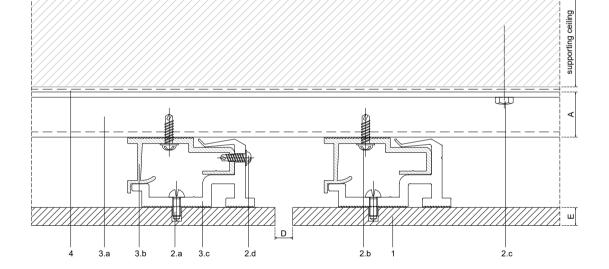

Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

	PRODUCT	SYSTEM	DRAWN BY	DATE
PARKLEX PRODEMA	NATURSOFFIT	CONCEALED FASTENING WITH HANGING HOOKS, ON SOFFITS	Joseba Salbide	01/2022
www.parklexprodema.com	PLAN# NSF1-01-A-B	TITLE DETAIL B-B' // JOINT DETAIL (GRAIN DIRECTION)	APPROVED BY Maialen Irastorza	PAGE 3 / 7

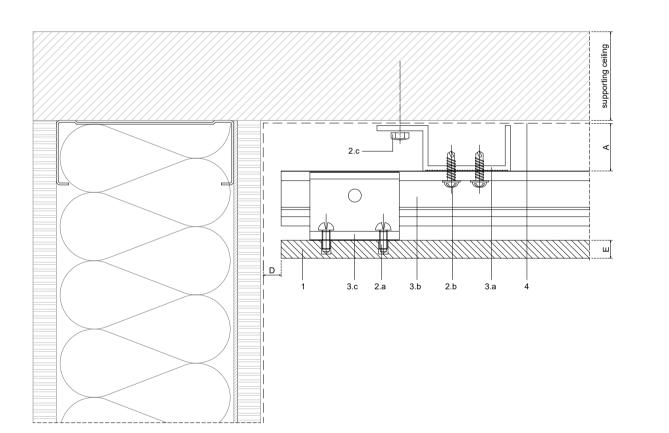

1	NATU	NATURSOFFIT			
2	Screws				
	2.a Hanging hook fastener - panel back				
	2.b	Channel fastener - by others			
	2.c Wall fixing screw - by others				
	2.d Fixing screw - by others				
3	Profile	es			
	3.a	Aluminum J profile			
	3.b Horizontal carrier rail				
	3.c Hanging hook				
4	Water resistant barrier - by others				
A	Requi	red min. air chamber ≥ 3/4" (20mm)			
_					


A	Required min. air chamber $\geq 3/4"$ (20mm)
В	Circulation of air \ge 3/4" (20mm)
D	Expansion joint 1/4" - 5/16" (6-8mm)
Е	Panel thickness ≥ 5/16" (8mm)
F	Distance from the screws to the panel edges 3/4" - 1 1/2" (20-40mm)



Measurements in inches are approximated. Real measurements in mm.

Scale 1:2


	PRODUCT	SYSTEM	DRAWN BY	DATE
PARKLEX PRODEMA	NATURSOFFIT	CONCEALED FASTENING WITH HANGING HOOKS, ON SOFFITS	Joseba Salbide	01/2022
www.parklexprodema.com	PLAN#	TITLE	APPROVED BY	PAGE
	NSF1-02-A-C	DETAIL C-C' // SOFFIT-WALL INTERIOR CORNER (PERP. TO GRAIN DIRECTION)	Maialen Irastorza	4 / 7

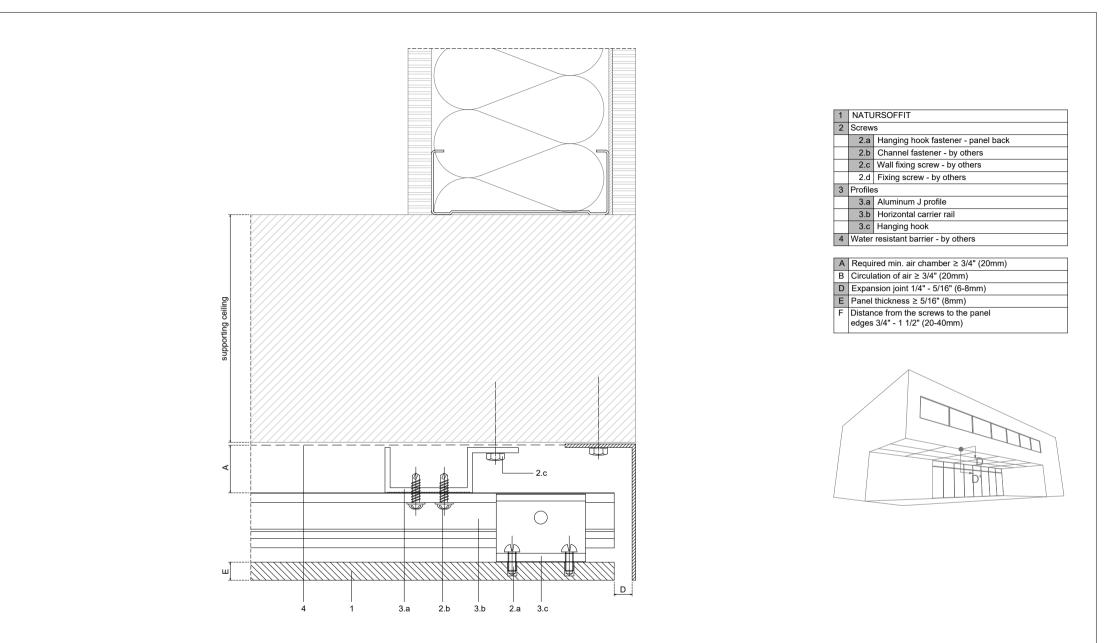

Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

Γ		PRODUCT	SYSTEM	DRAWN BY	DATE
	PARKLEX PRODEMA	NATURSOFFIT	CONCEALED FASTENING WITH HANGING HOOKS, ON SOFFITS	Joseba Salbide	01/2022
		PLAN#	TITLE	APPROVED BY	PAGE
		NSF1-02-A-D	DETAIL D-D" // SOFFIT-WALL EXTERIOR CORNER (PERP. TO GRAIN DIRECTION)	Maialen Irastorza	5 / 7

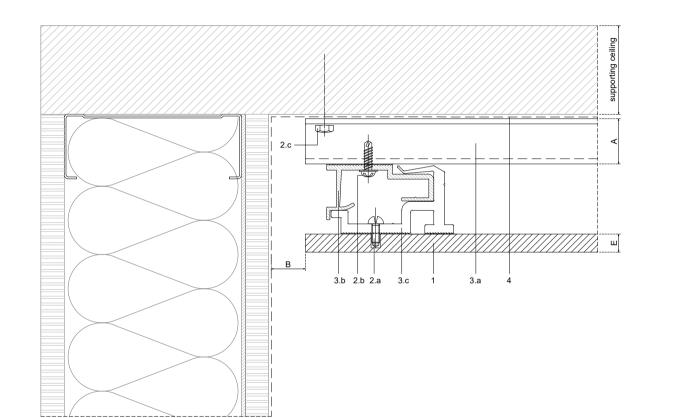

1	NATU	NATURSOFFIT				
2	Screws					
	2.a Hanging hook fastener - panel back					
	2.b	Channel fastener - by others				
	2.c	Wall fixing screw - by others				
	2.d Fixing screw - by others					
3	Profiles					
	3.a	Aluminum J profile				
	3.b	Horizontal carrier rail				
	3.c	Hanging hook				
4	Water	resistant barrier - by others				
А	Required min. air chamber ≥ 3/4" (20mm)					
В	Circulation of air \ge 3/4" (20mm)					
D	Expar	nsion joint 1/4" - 5/16" (6-8mm)				
Е	Panel	thickness ≥ 5/16" (8mm)				


 F
 Distance from the screws to the panel edges 3/4" - 1 1/2" (20-40mm)



Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

	PRODUCT	SYSTEM	DRAWN BY	DATE
PARKLEX PRODEMA	NATURSOFFIT	CONCEALED FASTENING WITH HANGING HOOKS, ON SOFFITS	Joseba Salbide	01/2022
www.parklexprodema.com	PLAN#	TITLE	APPROVED BY	PAGE
	NSF1-02-A-E	DETAIL E-E' // SOFFIT-WALL INTERIOR CORNER (GRAIN DIRECTION)	Maialen Irastorza	6 / 7

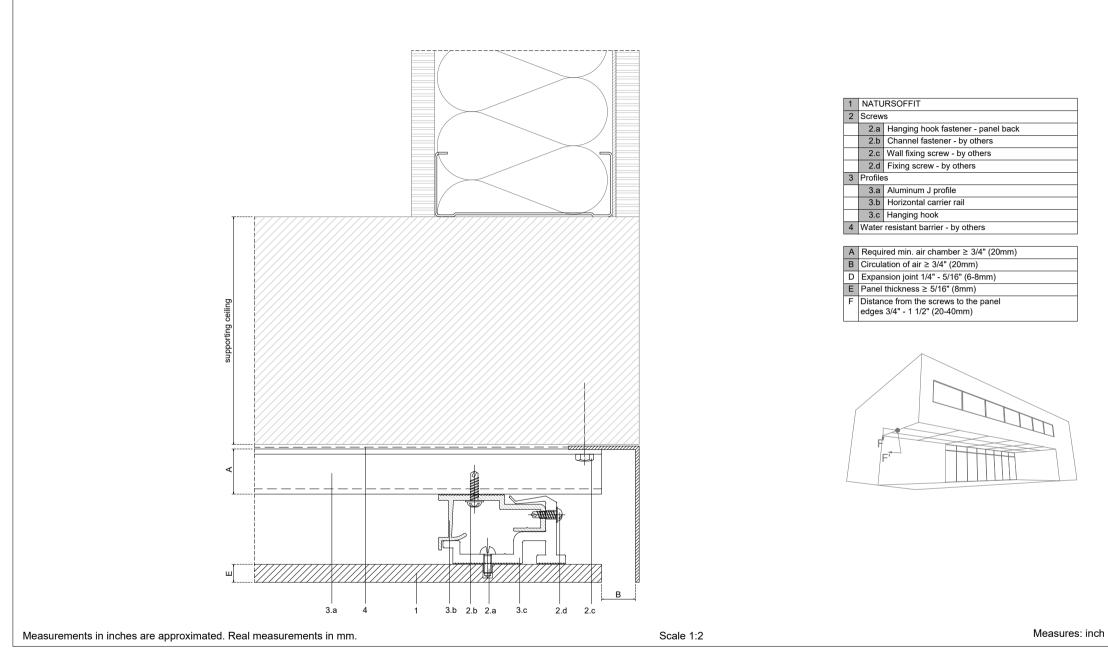

	PRODUCT		DRAWN BY	DATE
PARKLEX PRODEMA www.parklexprodema.com	NATURSOFFIT	CONCEALED FASTENING WITH HANGING HOOKS, ON SOFFITS	Joseba Salbide	01/2022
	PLAN#		APPROVED BY	PAGE
	NSF1-02-A-F	DETAIL F-F' // SOFFIT-WALL EXTERIOR CORNER (GRAIN DIRECTION)	Maialen Irastorza	7 / 7