


| | |
|-----|-------------------------------------|
| 1 | GRCLAD |
| 2 | Screws |
| 2.1 | Panel fastener metal |
| 2.2 | Channel fastener - by others |
| 2.3 | Wall fixing screw - by others |
| 3 | Profiles |
| 3.1 | Aluminum J profile |
| 3.2 | Aluminum HAT profile |
| 3.3 | Z-girt - by others |
| 3.4 | Jamb profile - by others |
| 3.5 | Sill profile - by others |
| 3.6 | Coronation profile - by others |
| 3.7 | Union profile - by others |
| 4 | Water resistant barrier - by others |
| 5 | Thermal insulation - by others |
| 6 | Vent. screen - by others |

| | |
|---|---|
| A | Required min. air chamber $\geq 3/4"$ (20mm) |
| B | Circulation of air $\geq 3/4"$ (20mm) |
| D | Expansion joint $1/4" - 3/8"$ (6-10mm) |
| E | Panel thickness $\geq 1/4"$ (6.4mm) |
| F | Distance from the screws to the panel edges $3/4" - 1 1/2"$ (20-40mm) |

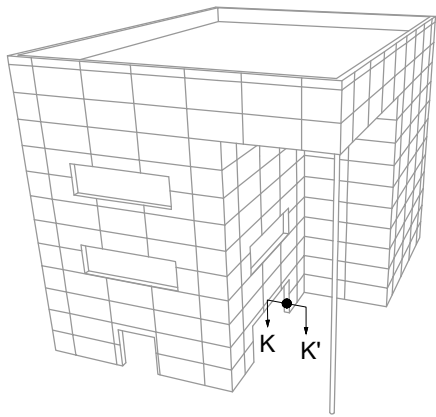

Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

Measures: inch

| | | | | |
|--|--------------|--|-------------------|---------|
| PARKLEX PRODEMA www.parklexprodema.com | PRODUCT | SYSTEM | DRAWN BY | DATE |
| | GRCLAD | EXPOSED SCREW FIXING ON ALUMINUM, WITH INSULATION | Mikel Maritxalar | 02/2024 |
| | PLAN# | TITLE | APPROVED BY | PAGE |
| | GRC1-01-B-K2 | DETAIL K-K' // DOOR JAMB 2 | Maialen Irastorza | 16 / 18 |