


|     |                                     |
|-----|-------------------------------------|
| 1   | GRCLAD                              |
| 2   | Screws                              |
| 2.1 | Panel fastener metal                |
| 2.2 | Channel fastener - by others        |
| 2.3 | Wall fixing screw - by others       |
| 3   | Profiles                            |
| 3.1 | Aluminium L profile (40x60)         |
| 3.2 | Wall bracket                        |
| 3.3 | Aluminium T profile                 |
| 3.4 | Jamb profile - by others            |
| 3.5 | Sill profile - by others            |
| 3.6 | Coronation profile - by others      |
| 4   | Water resistant barrier - by others |
| 5   | Thermal insulation - by others      |
| 6   | Vent. screen - by others            |
| 7   | Primary structure - by others       |

|   |   |
|---|---|
| A | Required min. air chamber $\geq 20\text{mm}$        |
| B | Circulation of air $\geq 20\text{mm}$               |
| D | Expansion joint 6-10mm                              |
| E | Panel thickness $\geq 6,4\text{mm}$                 |
| F | Distance from the screws to the panel edges 20-40mm |

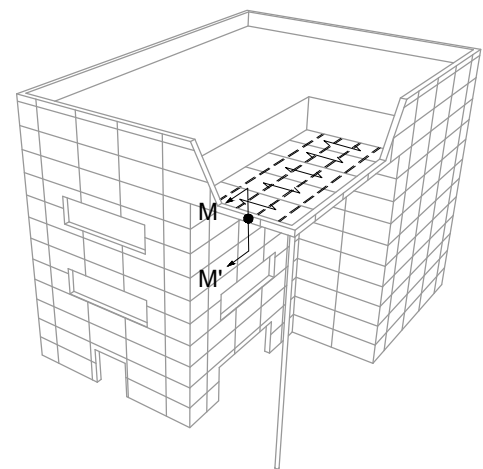

Scale 1:2

Measures: mm

**PARKLEX PRODEMA**  
www.parklexprodema.com

|         |           |        |  |             |                   |      |         |
|---------|-----------|--------|--|-------------|-------------------|------|---------|
| PRODUCT | GRCLAD    | SYSTEM | EXPOSED SCREW FIXING<br>WITH METALLIC PROFILES AND WALL BRACKETS | DRAWN BY    | Mikel Maritxalar  | DATE | 01/2024 |
| PLAN#   | GRC2-01-M | TITLE  | DETAIL M-M' // SIDE VENTILATION DROPPED CEILING                  | APPROVED BY | Maialen Irastorza | PAGE | 18 / 18 |