
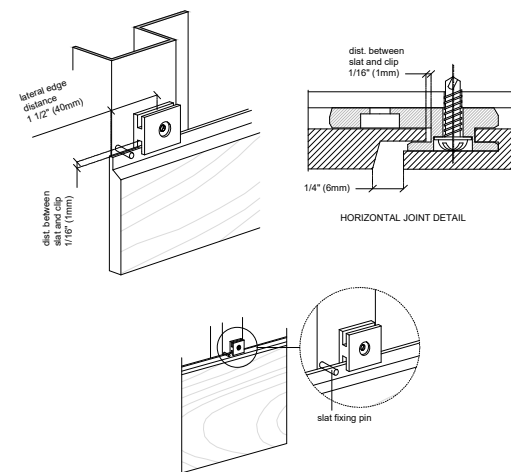
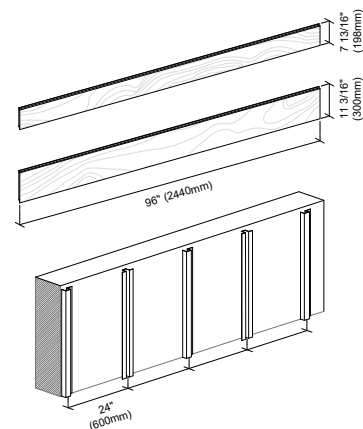


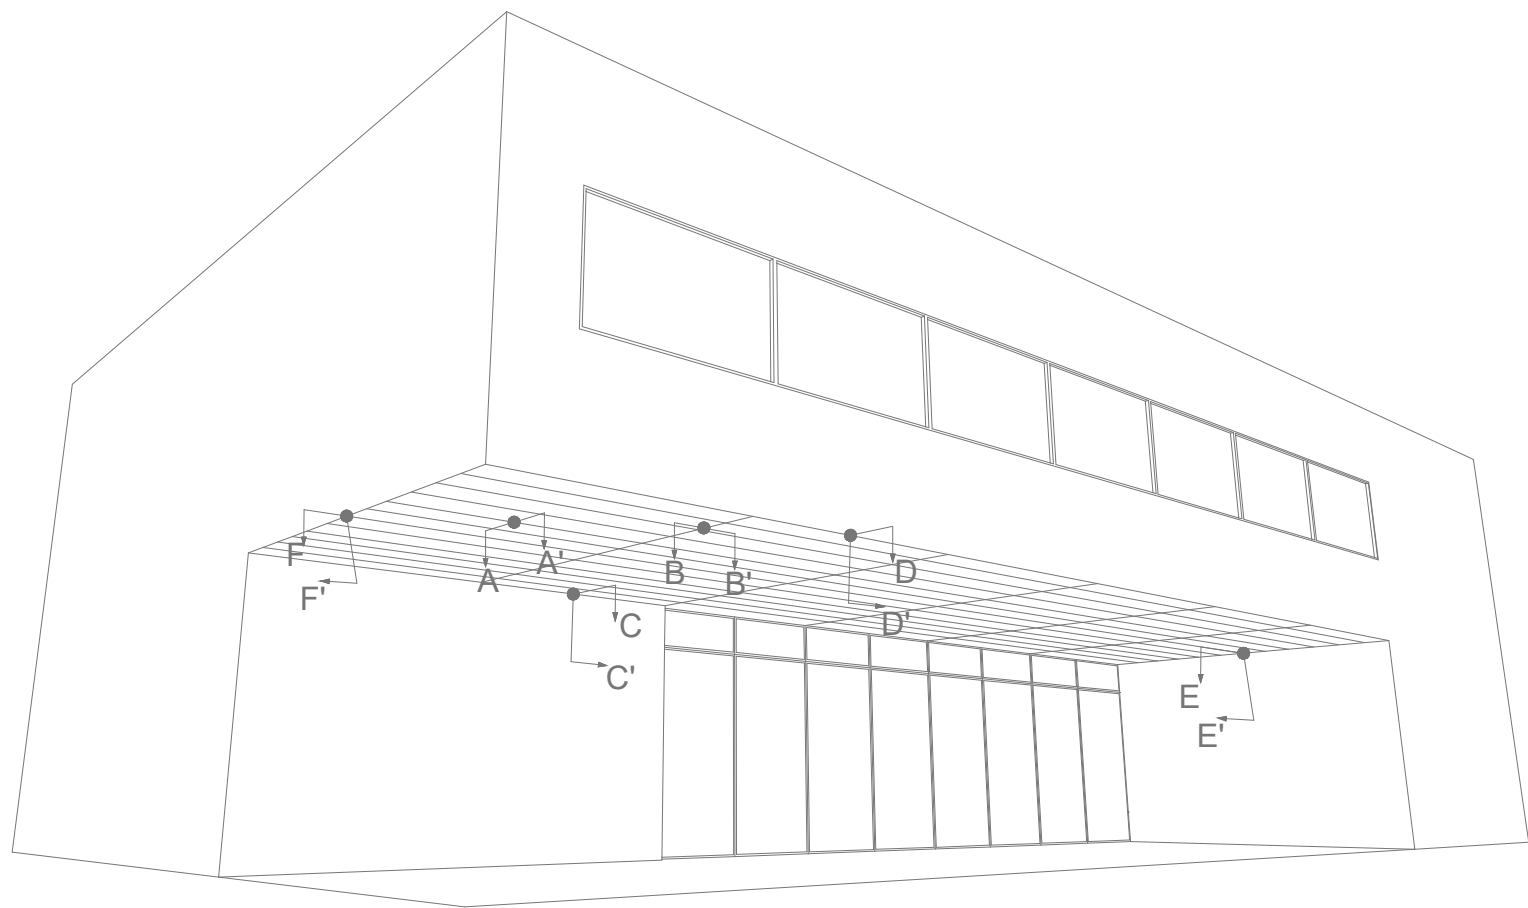

FIXING DETAIL


A-A'	JOINT DETAIL (PERP. TO GRAIN DIRECTION)
B-B'	JOINT DETAIL (GRAIN DIRECTION)
C-C'	SOFFIT-WALL INTERIOR DETAIL (PERP. TO GRAIN DIRECTION)
D-D'	SOFFIT-WALL EXTERIOR DETAIL (PERP. TO GRAIN DIRECTION)
E-E'	SOFFIT-WALL INTERIOR DETAIL (GRAIN DIRECTION)
F-F'	SOFFIT-WALL EXTERIOR DETAIL (GRAIN DIRECTION)

Measurements in inches are approximated. Real measurements in mm.

The updated version of this present installation detail can be found on the PARKLEX PRODEMA web.
Panel sizes and maximum distances in technical catalogue.


PARKLEX PRODEMA
www.parklexprodema.com

PRODUCT	SYSTEM	DRAWN BY	DATE
NATURSOFFIT	EXTERIOR SLAT SYSTEM (METAL FRAME), ON SOFFITS	Joseba Salbide	01/2022
PLAN#	TITLE	APPROVED BY	PAGE
NSF1-03-A-G.P.	GENERAL PERSPECTIVE	Maialen Irastorza	1 / 7

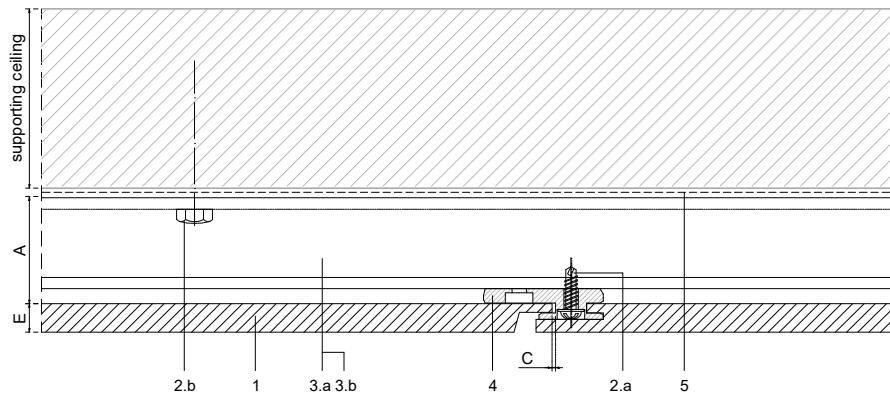

1	NATURSOFFIT
2	Screws
2.a	Clip fixing screw
2.b	Wall fixing screw - by others
2.c	Sx3 screw
2.d	Washer 1/8" (3mm) - by others
3	Profiles
3.a	Aluminum J profile
3.b	Aluminum HAT profile
4	Fixing clip
5	Water resistant barrier - by others

A	Required min. air chamber $\geq 3/4"$ (20mm)
B	Circulation of air $\geq 3/4"$ (20mm)
C	Horizontal expansion joint $1/16"$ (1mm)
D	Vertical expansion joint $1/4"-5/16"$ (6-8mm)
E	Panel thickness $\geq 5/16"$ (8mm)

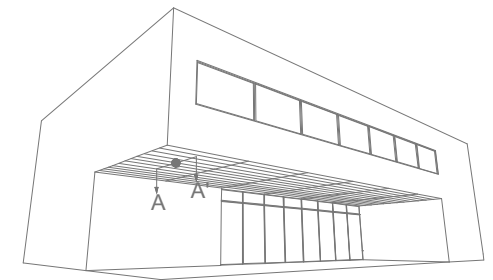


Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

Measures: inch


PARKLEX PRODEMA
www.parklexprodema.com

PRODUCT	SYSTEM	DRAWN BY	DATE
NATURSOFFIT	EXTERIOR SLAT SYSTEM (METAL FRAME), ON SOFFITS	Joseba Salbide	01/2022
PLAN#	TITLE	APPROVED BY	PAGE
NSF1-03-A-A	DETAIL A-A' // JOINT DETAIL (PERP. TO GRAIN DIRECTION)	Maialen Irastorza	2 / 7

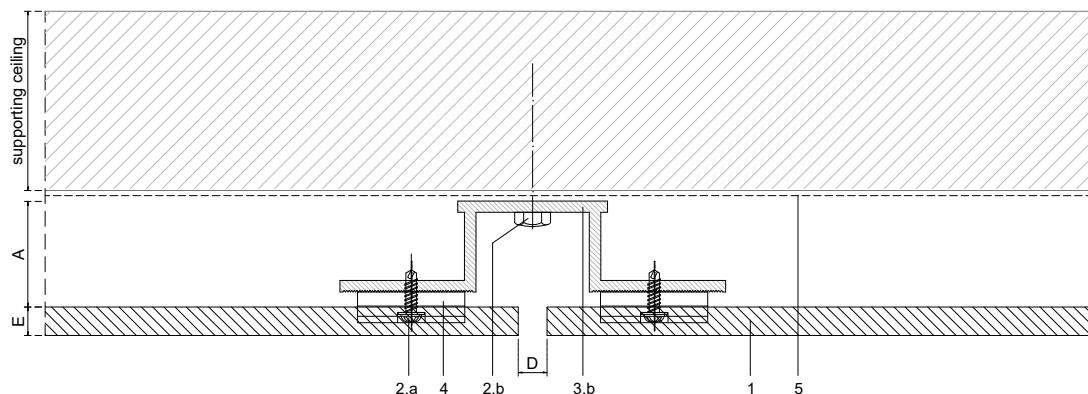

1	NATURSOFFIT
2	Screws
2.a	Clip fixing screw
2.b	Wall fixing screw - by others
2.c	Sx3 screw
2.d	Washer 1/8" (3mm) - by others
3	Profiles
3.a	Aluminum J profile
3.b	Aluminum HAT profile
4	Fixing clip
5	Water resistant barrier - by others

A	Required min. air chamber $\geq 3/4"$ (20mm)
B	Circulation of air $\geq 3/4"$ (20mm)
C	Horizontal expansion joint $1/16"$ (1mm)
D	Vertical expansion joint $1/4"-5/16"$ (6-8mm)
E	Panel thickness $\geq 5/16"$ (8mm)

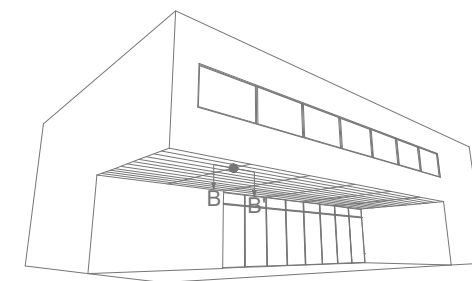


Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

Measures: inch


PARKLEX PRODEMA
www.parklexprodema.com

PRODUCT	SYSTEM	DRAWN BY	DATE
NATURSOFFIT	EXTERIOR SLAT SYSTEM (METAL FRAME), ON SOFFITS	Joseba Salbide	01/2022
PLAN#	TITLE	APPROVED BY	PAGE
NSF1-03-A-B	DETAIL B-B' // JOINT DETAIL (GRAIN DIRECTION)	Maialen Irastorza	3 / 7

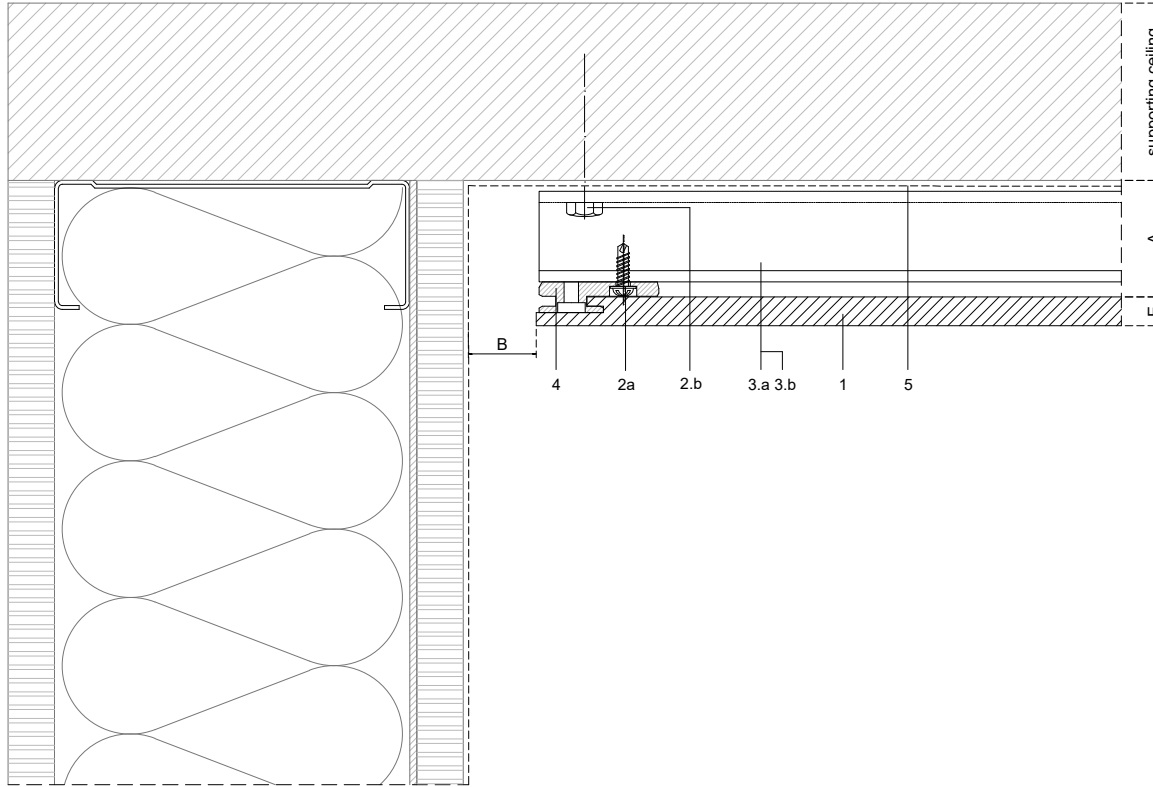

1	NATURSOFFIT
2	Screws
2.a	Clip fixing screw
2.b	Wall fixing screw - by others
2.c	Sx3 screw
2.d	Washer 1/8" (3mm) - by others
3	Profiles
3.a	Aluminum J profile
3.b	Aluminum HAT profile
4	Fixing clip
5	Water resistant barrier - by others

A	Required min. air chamber $\geq 3/4"$ (20mm)
B	Circulation of air $\geq 3/4"$ (20mm)
C	Horizontal expansion joint $1/16"$ (1mm)
D	Vertical expansion joint $1/4"-5/16"$ (6-8mm)
E	Panel thickness $\geq 5/16"$ (8mm)

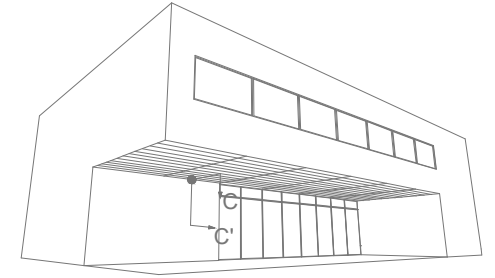


Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

Measures: inch


PARKLEX PRODEMA
www.parklexprodema.com

PRODUCT	SYSTEM	DRAWN BY	DATE
NATURSOFFIT	EXTERIOR SLAT SYSTEM (METAL FRAME), ON SOFFITS	Joseba Salbide	01/2022
PLAN#	TITLE	APPROVED BY	PAGE
NSF1-03-A-C	DETAIL C-C' // SOFFIT-WALL INTERIOR CORNER (PERP. TO GRAIN DIRECTION)	Maialen Irastorza	4 / 7

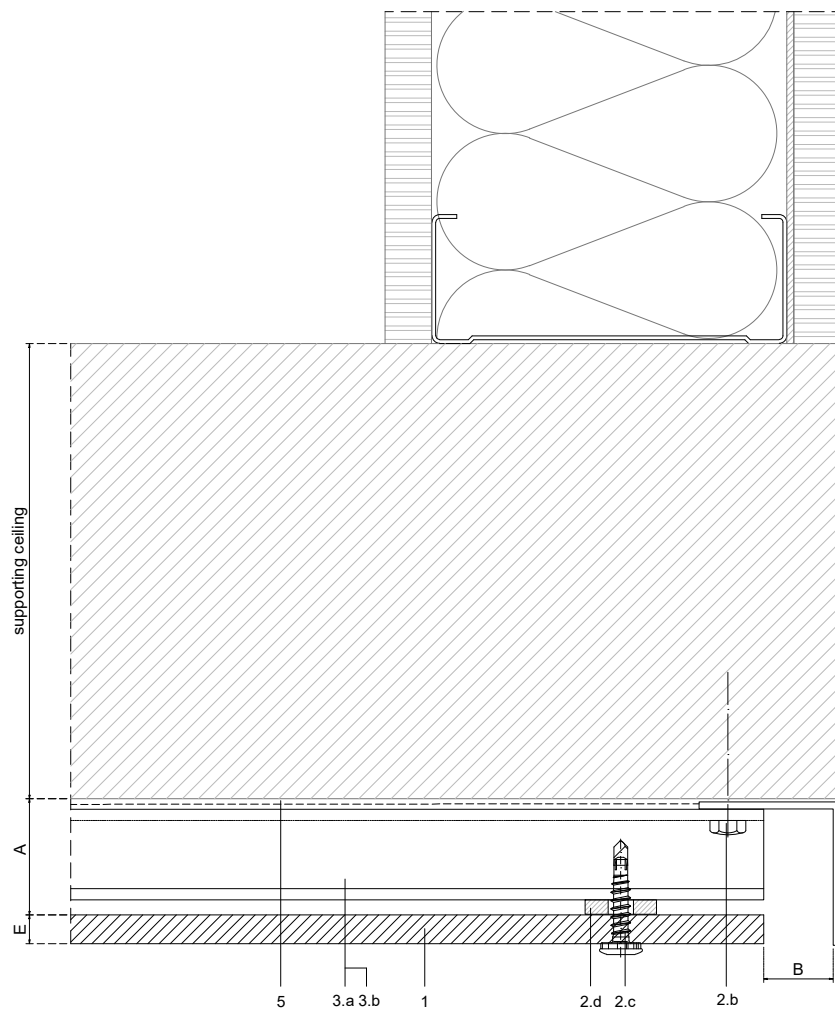

1	NATURSOFFIT
2	Screws
2.a	Clip fixing screw
2.b	Wall fixing screw - by others
2.c	Sx3 screw
2.d	Washer 1/8" (3mm) - by others
3	Profiles
3.a	Aluminum J profile
3.b	Aluminum HAT profile
4	Fixing clip
5	Water resistant barrier - by others

A	Required min. air chamber $\geq 3/4"$ (20mm)
B	Circulation of air $\geq 3/4"$ (20mm)
C	Horizontal expansion joint $1/16"$ (1mm)
D	Vertical expansion joint $1/4"-5/16"$ (6-8mm)
E	Panel thickness $\geq 5/16"$ (8mm)

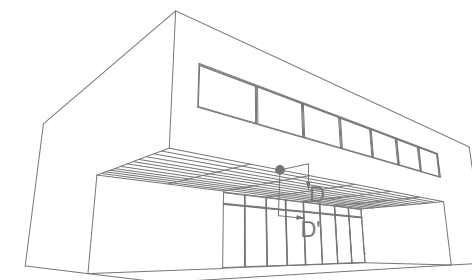


Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

Measures: inch


PARKLEX PRODEMA
www.parklexprodema.com

PRODUCT	SYSTEM	DRAWN BY	DATE
NATURSOFFIT	EXTERIOR SLAT SYSTEM (METAL FRAME), ON SOFFITS	Joseba Salbide	01/2022
PLAN#	TITLE	APPROVED BY	PAGE
NSF1-03-A-D	DETAIL D-D' // SOFFIT-WALL EXTERIOR CORNER (PERP. TO GRAIN DIRECTION)	Maialen Irastorza	5 / 7

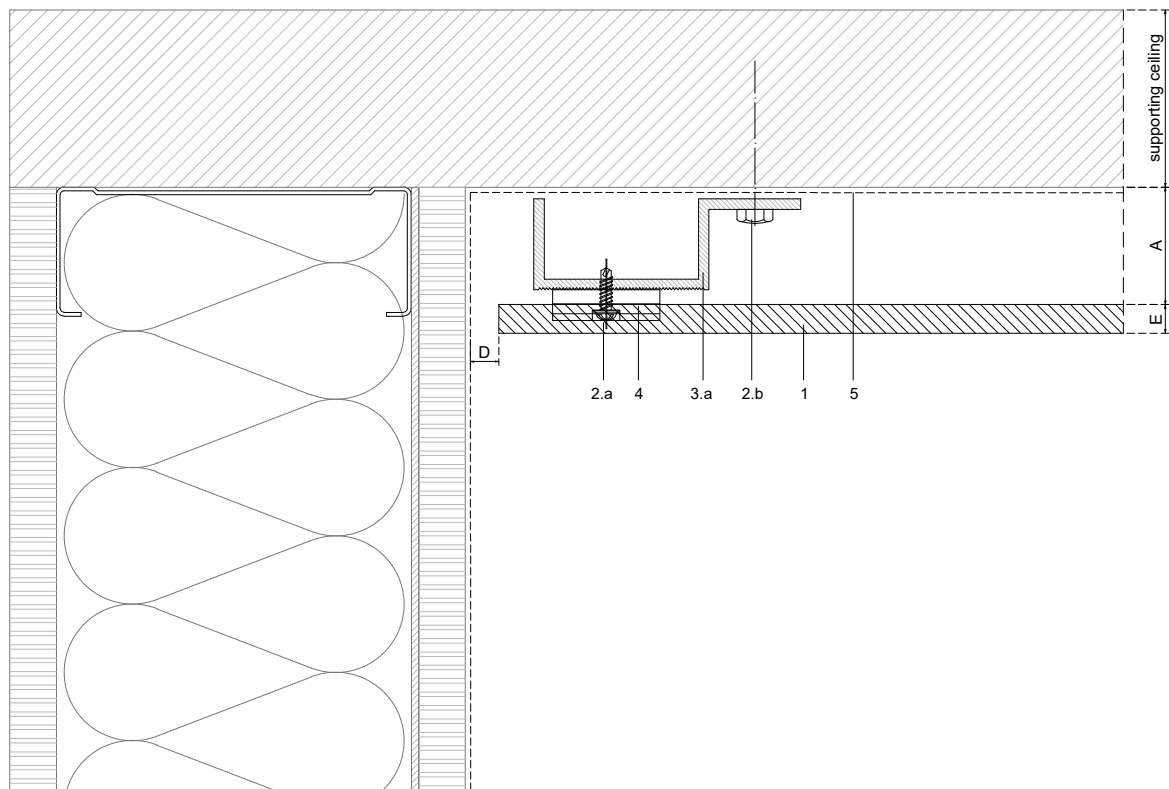

1	NATURSOFFIT
2	Screws
2.a	Clip fixing screw
2.b	Wall fixing screw - by others
2.c	Sx3 screw
2.d	Washer 1/8" (3mm) - by others
3	Profiles
3.a	Aluminum J profile
3.b	Aluminum HAT profile
4	Fixing clip
5	Water resistant barrier - by others

A	Required min. air chamber $\geq 3/4"$ (20mm)
B	Circulation of air $\geq 3/4"$ (20mm)
C	Horizontal expansion joint $1/16"$ (1mm)
D	Vertical expansion joint $1/4"-5/16"$ (6-8mm)
E	Panel thickness $\geq 5/16"$ (8mm)

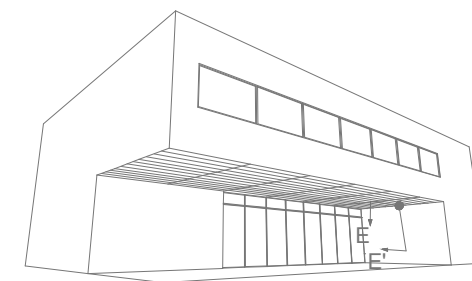


Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

Measures: inch


PARKLEX PRODEMA
www.parklexprodema.com

PRODUCT	NATURSOFFIT	SYSTEM	EXTERIOR SLAT SYSTEM (METAL FRAME), ON SOFFITS	DRAWN BY	Joseba Salbide	DATE	01/2022
PLAN#	NSF1-03-A-E	TITLE	DETAIL E-E' // SOFFIT-WALL INTERIOR CORNER (GRAIN DIRECTION)	APPROVED BY	Maialen Irastorza	PAGE	6 / 7

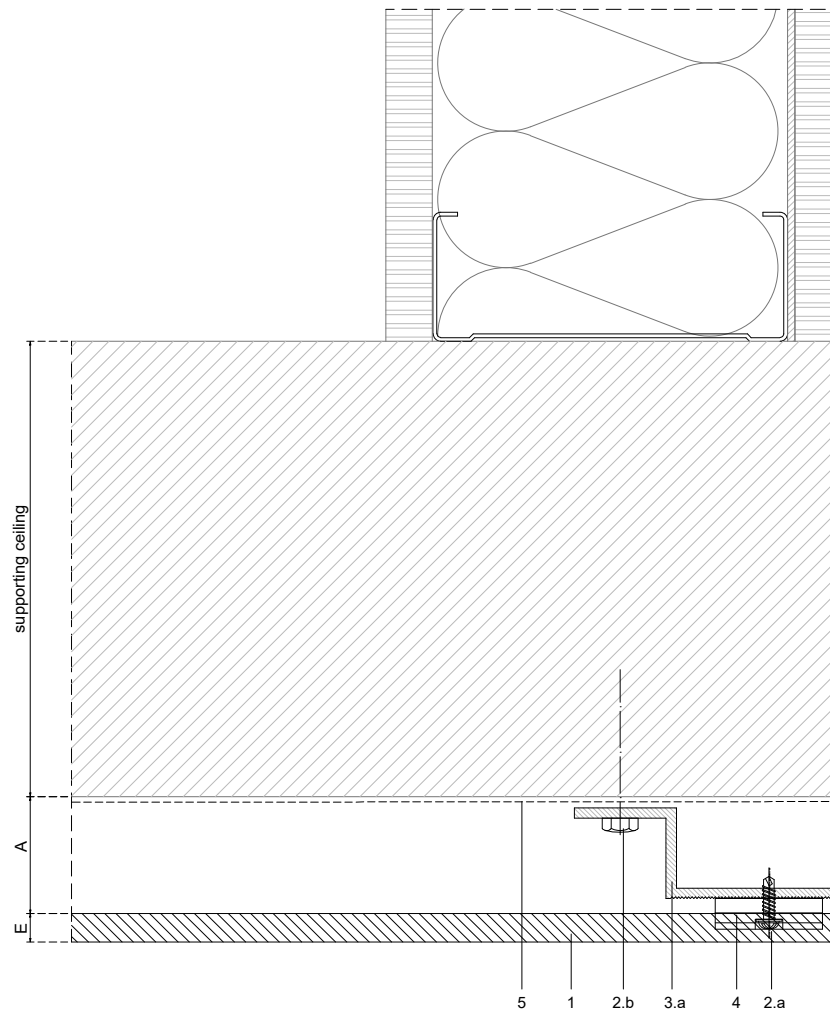

1	NATURSOFFIT
2	Screws
2.a	Clip fixing screw
2.b	Wall fixing screw - by others
2.c	Sx3 screw
2.d	Washer 1/8" (3mm) - by others
3	Profiles
3.a	Aluminum J profile
3.b	Aluminum HAT profile
4	Fixing clip
5	Water resistant barrier - by others

A	Required min. air chamber $\geq 3/4"$ (20mm)
B	Circulation of air $\geq 3/4"$ (20mm)
C	Horizontal expansion joint $1/16"$ (1mm)
D	Vertical expansion joint $1/4"-5/16"$ (6-8mm)
E	Panel thickness $\geq 5/16"$ (8mm)

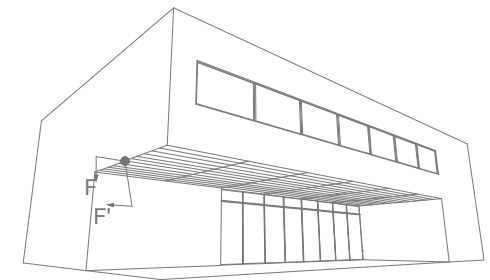

Measurements in inches are approximated. Real measurements in mm.

Scale 1:2

Measures: inch

PARKLEX PRODEMA
www.parklexprodema.com

PRODUCT	SYSTEM	DRAWN BY	DATE
NATURSOFFIT	EXTERIOR SLAT SYSTEM (METAL FRAME), ON SOFFITS	Joseba Salbide	01/2022
PLAN#	TITLE	APPROVED BY	PAGE
NSF1-03-A-F	DETAIL F-F' // SOFFIT-WALL EXTERIOR CORNER (GRAIN DIRECTION)	Maialen Irastorza	7 / 7